



AOS
SEMICONDUCTOR

产品规格说明书

Product Data Sheet

AOS62xP

WEB | www.aossemi.cn 



电源管理IC



通信接口芯片



二三极管



LDO稳压器



逻辑器件



MOSFETs



运算放大器



显示驱动



MCU单片机



光电器件



DESCRIPTIONS

The AOS62XP families of products offer low voltage operation and rail-to-rail input and output, as well as excellent speed/power consumption ratio, providing an excellent bandwidth (7MHz) and slew rate of 3.7V/us. The op-amps are unity gain stable and feature an ultra-low input bias current.

The AOS621P, AOS622P and AOS624P has lower offset, which is guaranteed not upper than $\pm 0.5mV$ at 25° C with $V_s = 5V$, $V_{cm} = V_s/2$.

The devices are ideal for sensor interfaces, active filters and portable applications. The AOS62X families of operational amplifiers are specified at the full temperature range of -40°C to +125°C under single or dual power supplies of 2.5V to 5.5V.





FEATURES

- HIGH GAIN BANDWIDTH: 7MHz
- RAIL-TO-RAIL INPUT AND OUTPUT $\pm 0.5mV$ Max V_{os}
- INPUT VOLTAGE RANGE: -0.1V to +5.6V with $V_s = 5.5V$
- SUPPLY RANGE: +2.5V to +5.5V
- SHUTDOWN: AOS621S/AOS622S
- SPECIFIED UP TO +125°C
- Micro SIZE PACKAGES: SOT23-5

APPLICATIONS

- SENSORS
- PHOTODIODE AMPLIFICATION
- ACTIVE FILTERS
- TEST EQUIPMENT
- DRIVING A/D CONVERTERS

PIN CONFIGURATIONS

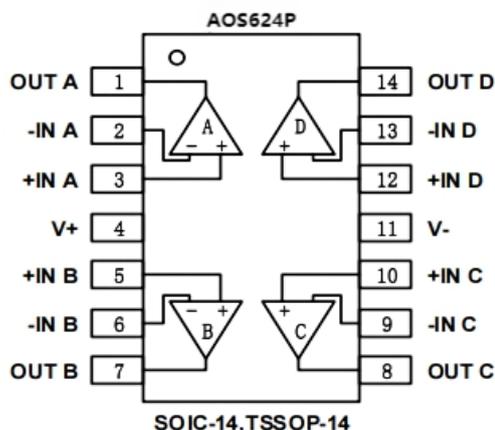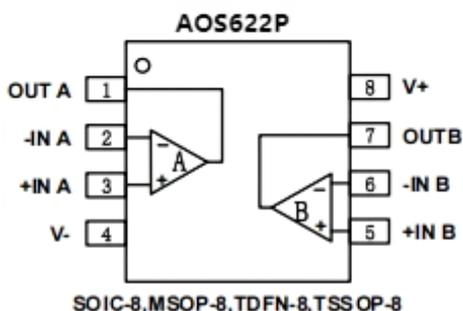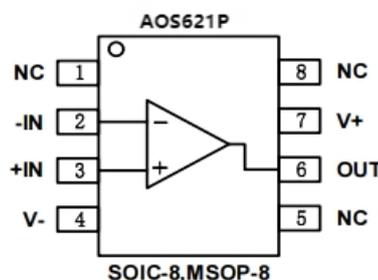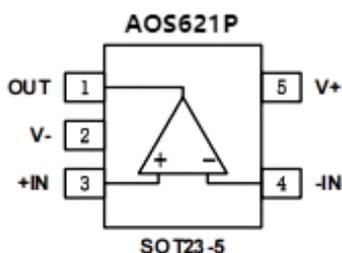

Note: NC indicates no internal connection



ABSOLUTE MAXIMUM RATINGS ⁽¹⁾

Supply Voltage, V+ to V-	7.0V
Input Terminals, Voltage ⁽²⁾	- 0.5 to (V+) + 0.5V
Current ⁽²⁾	±10mA
Storage Temperature	-65°C to +150°C
Operating Temperature	-40°C to +125°C
Junction Temperature	150°C
Package Thermal Resistance @ TA = +25°C	
SOT23-5, SOT23-6	200°C/W
MSOP-10, SOIC-8	150°C/W
SOIC-14, TSSOP-14	100°C/W
Lead Temperature (Soldering, 10s)	260°C
ESD Susceptibility	
HBM	5000V
MM	400V



ESD SENSITIVITY CAUTION

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

(1) Stresses above these ratings may cause permanent damage. Exposure to absolute maximum conditions for extended periods may degrade device reliability. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those specified is not implied.

(2) Input terminals are diode-clamped to the power-supply rails. Input signals that can swing more than 0.5V beyond the supply rails should be current-limited to 10mA or less.

PACKAGE/ORDERING INFORMATION

PRODUCT	ORDERING NUMBER	TEMPERATURE RANGE	PACKAGE LEAD	PACKAGE MARKING	PACKAGE OPTION
AOS621P	AOS621PXX	-40 ~125	SOIC-8	AOS621	Tape and Reel, 2500
	AOS621PXF	-40 ~125	SOT23-5	621	Tape and Reel, 3000
	AOS621BPXF	-40 ~125	SOT23-5	621B	Tape and Reel, 3000
	AOS621PXM	-40 ~125	MSOP-8	AOS621	Tape and Reel, 3000
AOS622P	AOS622PXX	-40 ~125	SOIC-8	AOS622	Tape and Reel, 2500
	AOS622PXM	-40 ~125	MSOP-8	AOS622	Tape and Reel, 3000
	AOS622PXT	-40 ~125	TDFN-8	AOS622	Tape and Reel, 3000
	AOS622PXQ	-40 ~125	TSSOP-8	AOS622	Tape and Reel, 3000
AOS624P	AOS624PXP	-40 ~125	SOIC-14	AOS624	Tape and Reel, 2500
	AOS624PXQ	-40 ~125	TSSOP-14	AOS624	Tape and Reel, 3000



ELECTRICAL CHARACTERISTICS

(At $T_A = +25^\circ\text{C}$, $V_S = 5\text{V}$, $R_L = 10\text{k}$ connected to $V_S/2$, and $V_{OUT} = V_S/2$, unless otherwise noted.)

PARAMETER	CONDITIONS	T_J	AOS621P, AOS622P, AOS624P			UNITS
			MIN	TYP	MAX	
POWER SUPPLY						
V_S	Operating Voltage Range	25	2.5		5.5	V
I_Q	Quiescent Current/Amplifier	25		600	800	μA
PSRR	Power-Supply Rejection Ratio	$V_S = 2.5\text{V to } 5.5\text{V}$ $V_{cm} = (V_-) + 0.5\text{V}$	25	78	93	dB
		-40 to 125	72			
INPUT						
V_{os}	Input Offset Voltage	$V_{cm} = V_S/2$	25		± 0.1	± 0.5 mV
$V_{os\ TC}$	Input Offset Voltage Drift	-40 to 125		2		$\mu\text{V}/$
I_B	Input Bias Current		25	1	10	μA
I_{os}	Input Offset Current		25	1	10	μA
V_{cm}	Common-Mode Voltage Range	$V_S = 5.5\text{V}$	25	-0.1	5.6	V
CMRR	Common-Mode Rejection Ratio	$V_S = 5.5\text{V}$, $V_{cm} = -0.1\text{V to } 4\text{V}$	25	74	92	dB
			-40 to 125	68		
		$V_S = 5.5\text{V}$, $V_{cm} = -0.1\text{V to } 5.6\text{V}$	25	63	83	
			-40 to 125	60		
OUTPUT						
AOL	Open-Loop Voltage Gain	$R_L = 2\text{k}$, $V_o = 0.15\text{V to } 4.85\text{V}$	25	96	102	dB
			-40 to 125	83		
		$R_L = 10\text{k}$, $V_o = 0.05\text{V to } 4.95\text{V}$	25	98	106	
			-40 to 125	85		
	Output Swing From Rail	$R_L = 2\text{k}$	25	40		mV
		$R_L = 10\text{k}$	25	7		
I_{out}	Output Short-Circuit Current		25	50		mA















FREQUENCY RESPONSE							
SR	Slew Rate		25		3.7		V/us
GBP	Gain-Bandwidth Product		25		7		MHz
m	Phase Margin		25		64		°
ts	Settling Time, 0.1%				0.5		us
	Overload Recovery Time	$V_{IN} \cdot Gain$	V_s		0.5		us
NOISE							
en	Input-Referred Voltage Noise	$f = 1 \text{ kHz}$	25		11		nV/ Hz
		$f = 10 \text{ kHz}$	25		7.5		nV/ Hz



TYPICAL CHARACTERISTICS


At $T_A = +25^\circ\text{C}$, $V_S = 5\text{V}$, $R_L = 10\text{k}$ connected to $V_S/2$, $V_{OUT} = V_S/2$, unless otherwise noted.

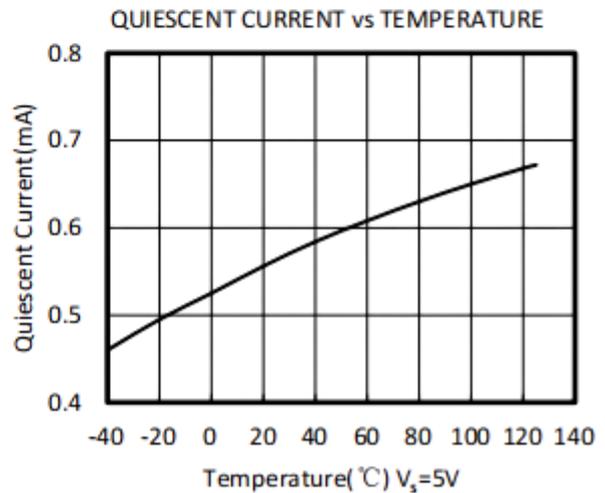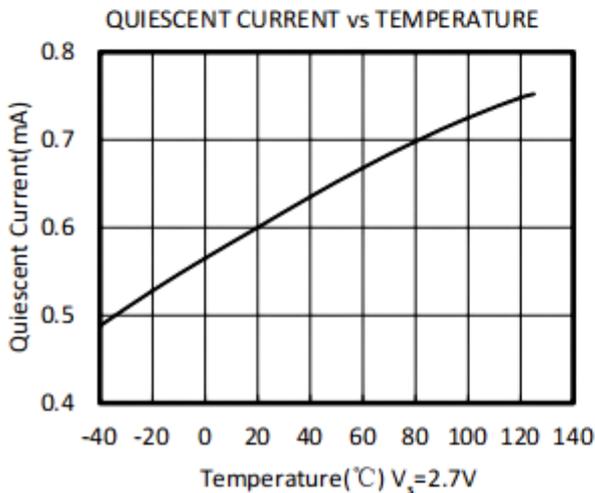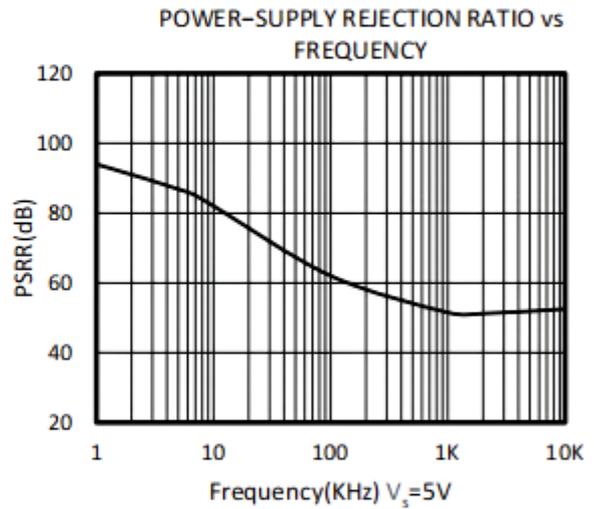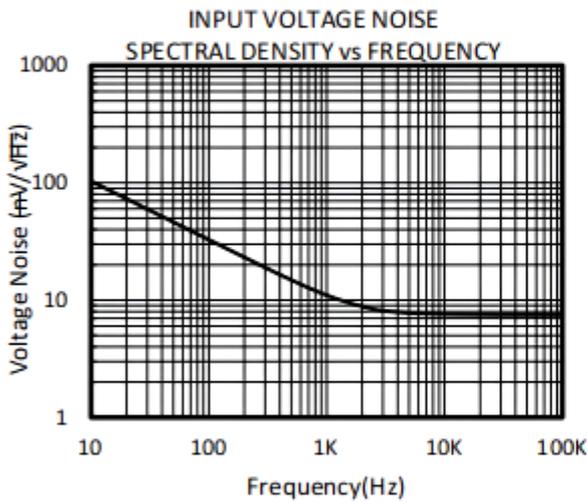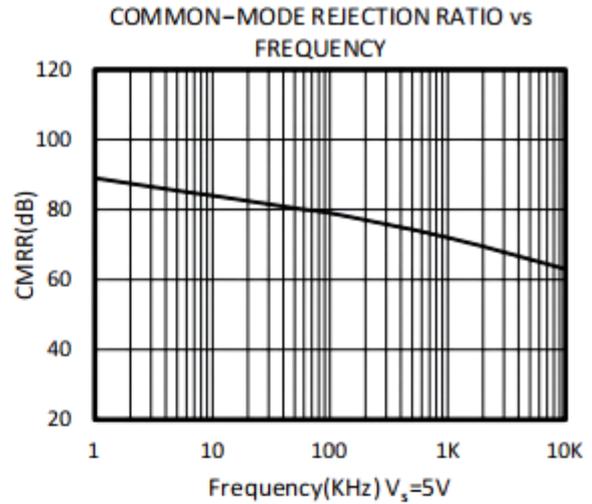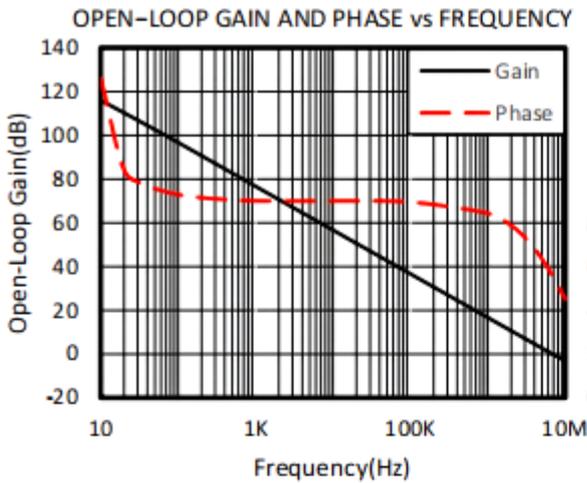

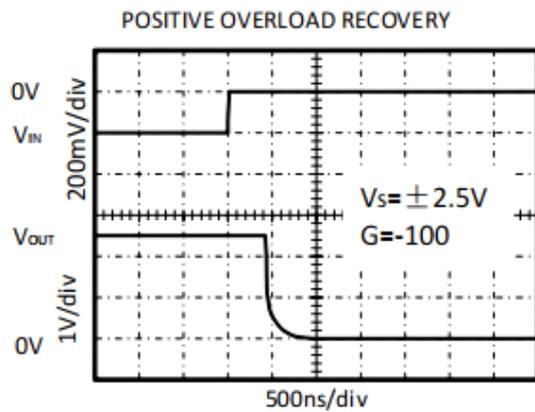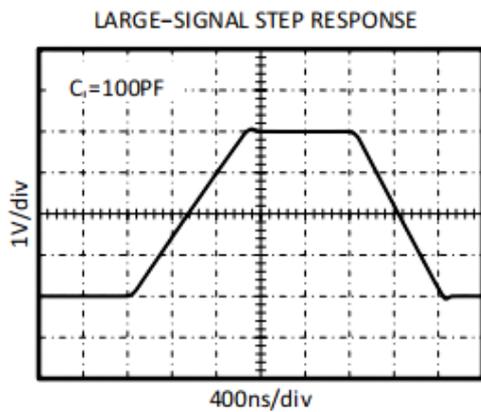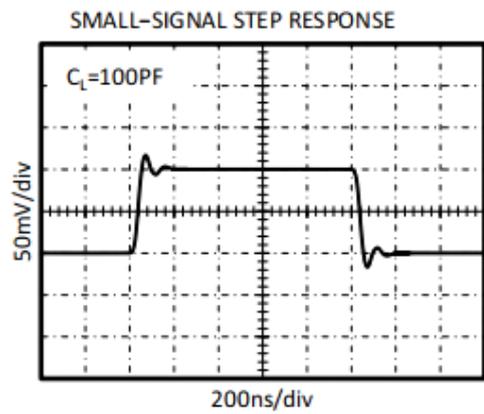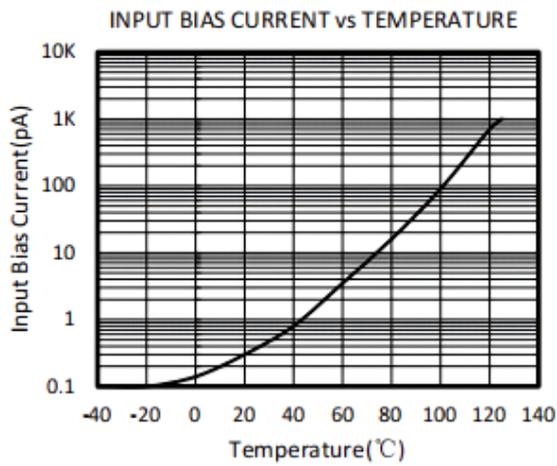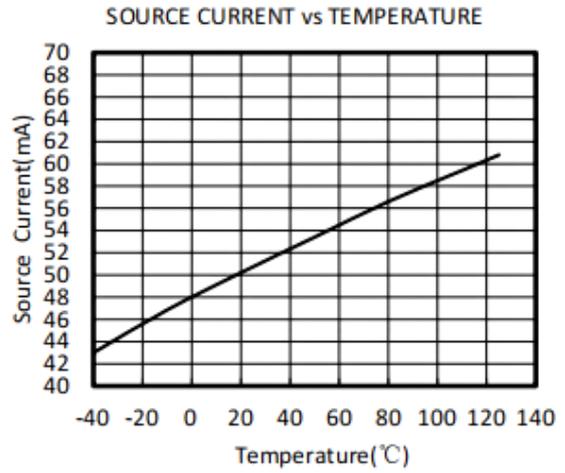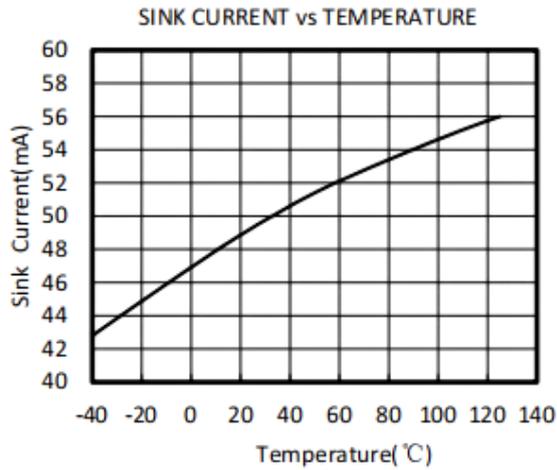



NEGATIVE OVERLOAD RECOVERY

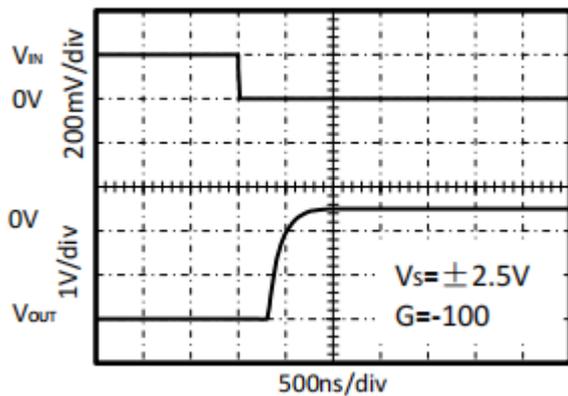



APPLICATION NOTES

The AOS621P, AOS622P, AOS624P are high precision, rail-to-rail operational amplifiers that can be run from a single-supply voltage 2.5V to 5.5V ($\pm 1.25V$ to $\pm 2.75V$). Supply voltages higher than 7V (absolute maximum) can permanently damage the amplifier. Rail-to-rail input and output swing significantly increases dynamic range, especially in low-supply applications.

Good layout practice mandates use of a 0.1uF capacitor placed closely across the supply pins.

LAYOUT GUIDELINS

Attention to good layout practices is always recommended. Keep traces short. When possible, use a PCB ground plane with surface-mount components placed as close to the device pins as possible. Place a 0.1uF capacitor closely across the supply pins. These guidelines should be applied throughout the analog circuit to improve performance and provide benefits such as reducing the EMI susceptibility.

INSTRUMENTATION AMPLIFIER

In the three-op amp, instrumentation amplifier configuration shown in Figure2

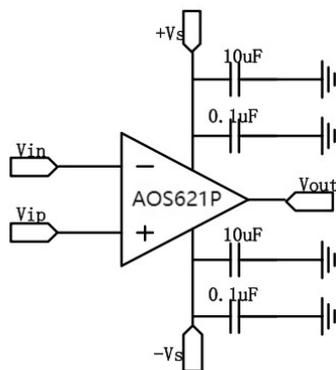


Figure1. Amplifier with Bypass Capacitors



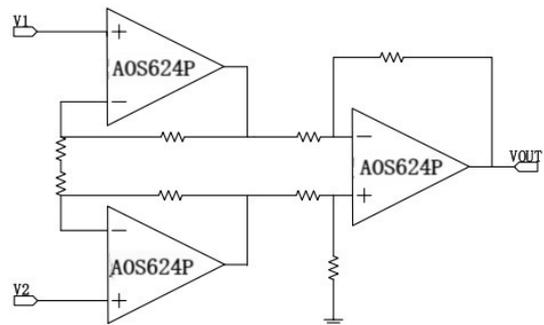




Figure2. Amplifier instrumentation amplifier

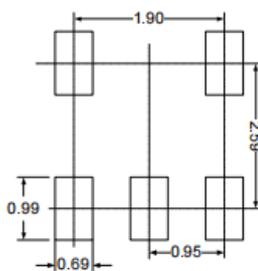

PACKAGE OUTLINE DIMENSIONS
SOT23-5

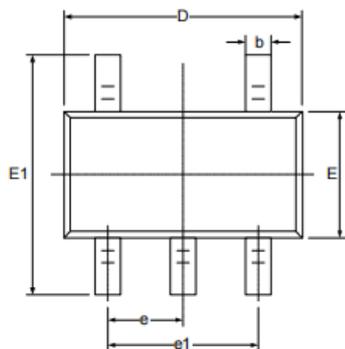



RECOMMENDED LAND PATTERN (Unit: mm)

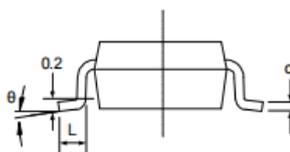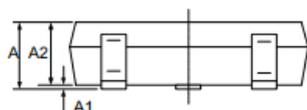



Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	1.050	1.250	0.041	0.049
A1	0.000	0.100	0.000	0.004
A2	1.050	1.150	0.041	0.045
b	0.300	0.500	0.012	0.020
c	0.100	0.200	0.004	0.008
D	2.820	3.020	0.111	0.119
E	1.500	1.700	0.059	0.067
E1	2.650	2.950	0.104	0.116
e	0.950(BSC)		0.037(BSC)	
e1	1.800	2.000	0.071	0.079
L	0.300	0.600	0.012	0.024
	0°	8°	0°	8°



MSOP-8

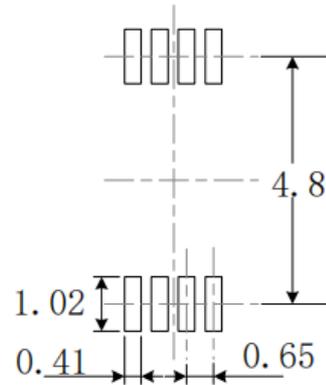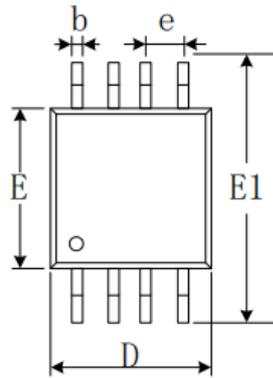


RECOMMENDED LAND PATTERN (Unit: mm)

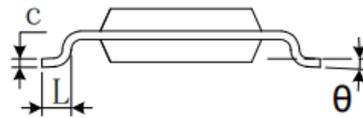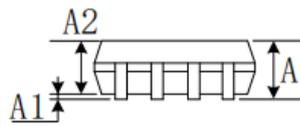

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	0.820	1.100	0.032	0.043
A1	0.020	0.150	0.001	0.006
A2	0.750	0.950	0.030	0.037
b	0.250	0.380	0.010	0.015
c	0.090	0.230	0.004	0.009
D	2.900	3.100	0.114	0.122
e	0.650(BSC)		0.026(BSC)	
E	2.900	3.100	0.114	0.122
E1	4.750	5.050	0.187	0.199
L	0.400	0.800	0.016	0.031
	0°	6°	0°	6°



TSSOP-8

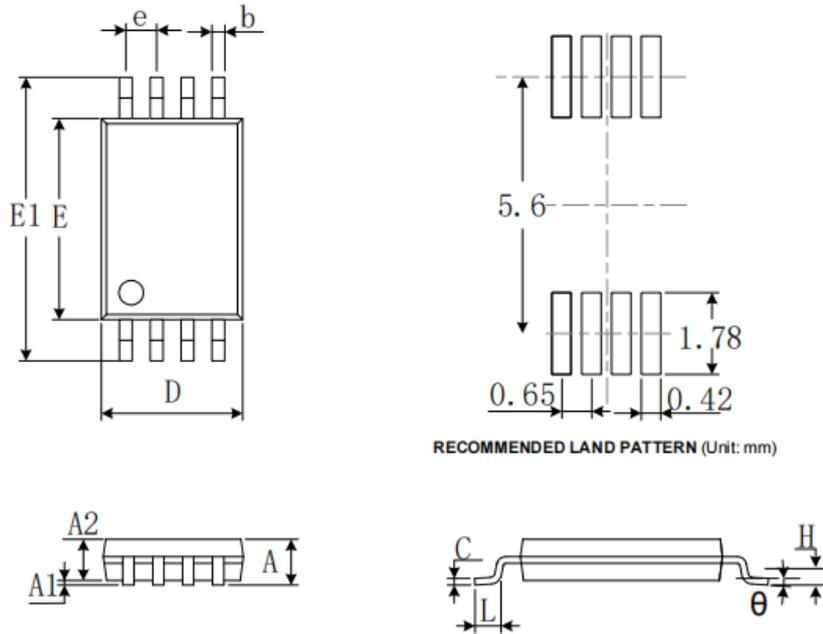


RECOMMENDED LAND PATTERN (Unit: mm)

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A		1.200		0.047
A1	0.050	0.150	0.002	0.006
A2	0.800	1.050	0.031	0.041
b	0.190	0.300	0.007	0.012
c	0.090	0.200	0.004	0.008
D	2.900	3.100	0.114	0.122
E	4.300	4.500	0.169	0.177
E1	6.250	6.550	0.246	0.258
e	0.650(BSC)		0.026(BSC)	
L	0.500	0.700	0.020	0.028
H	0.25(TYP)		0.01(TYP)	
	1°	7°	1°	7°




TSSOP-14

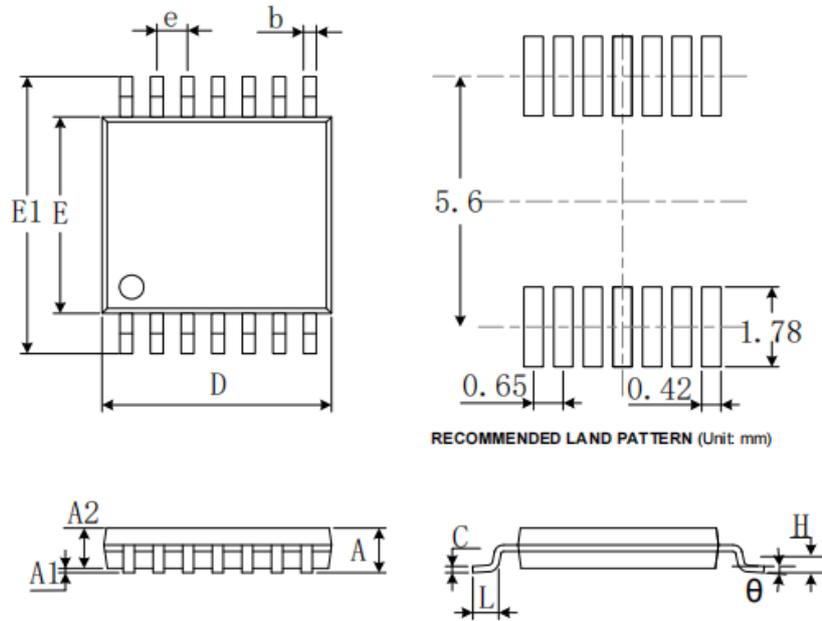

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A		1.200		0.047
A1	0.050	0.150	0.002	0.006
A2	0.800	1.050	0.031	0.041
b	0.190	0.300	0.007	0.012
c	0.090	0.200	0.004	0.008
D	4.860	5.100	0.191	0.201
E	4.300	4.500	0.169	0.177
E1	6.250	6.550	0.246	0.258
e	0.650(BSC)		0.026(BSC)	
L	0.500	0.700	0.020	0.028
H	0.25(TYP)		0.01(TYP)	
	1°	7°	1°	7°




S01C-8

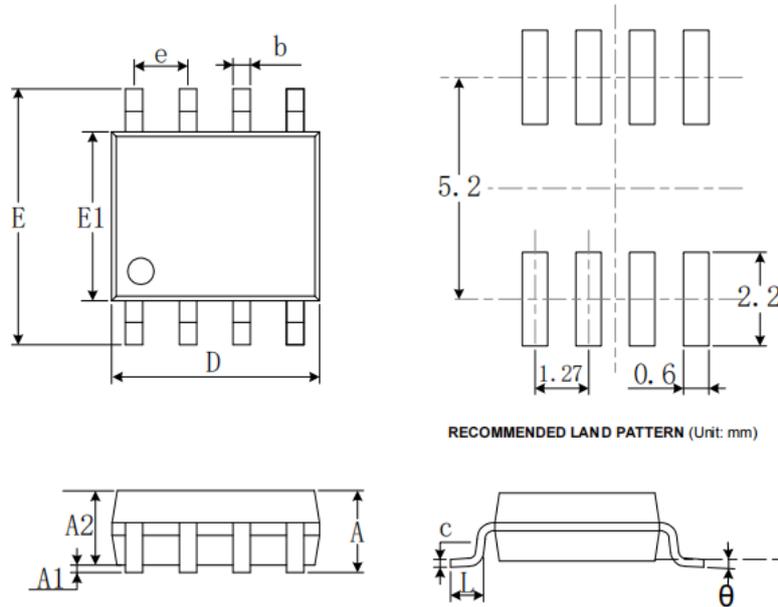

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	1.350	1.750	0.053	0.069
A1	0.100	0.250	0.004	0.010
A2	1.350	1.550	0.053	0.061
b	0.330	0.510	0.013	0.020
c	0.170	0.250	0.007	0.010
D	4.800	5.000	0.189	0.197
e	1.270(BSC)		0.050(BSC)	
E	5.800	6.200	0.228	0.244
E1	3.800	4.000	0.150	0.157
L	0.400	1.270	0.016	0.050
	0°	8°	0°	8°




S01C-14

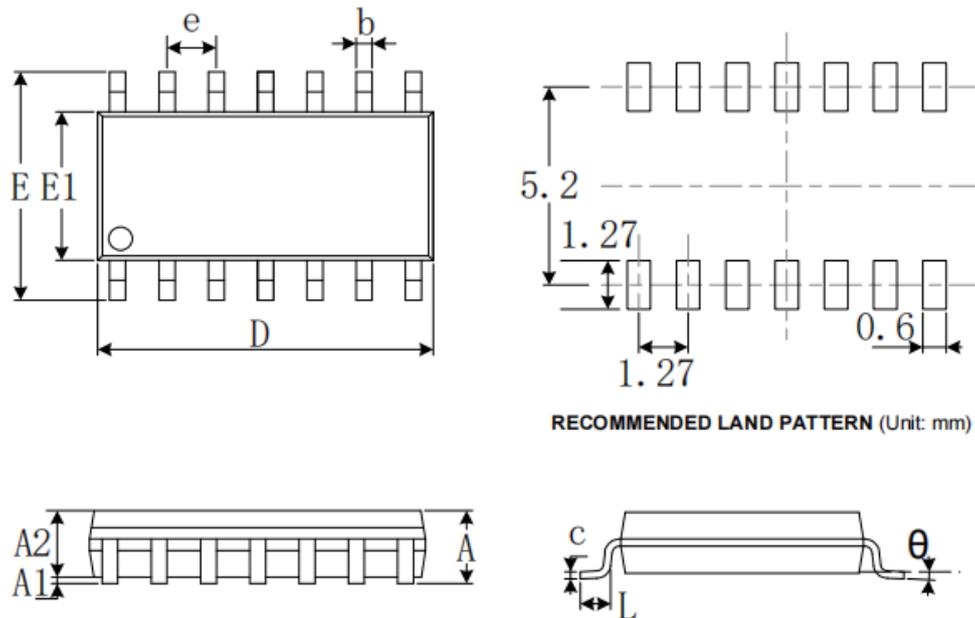


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	1.350	1.750	0.053	0.069
A1	0.100	0.250	0.004	0.010
A2	1.350	1.550	0.053	0.061
b	0.310	0.510	0.012	0.020
c	0.100	0.250	0.004	0.010
D	8.450	8.850	0.333	0.348
e	1.270(BSC)		0.050(BSC)	
E	5.800	6.200	0.228	0.244
E1	3.800	4.000	0.150	0.157
L	0.400	1.270	0.016	0.050
	0°	8°	0°	8°




TDFN-3x3-8L

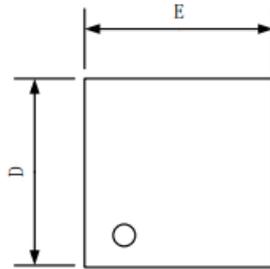

TOP VIEW

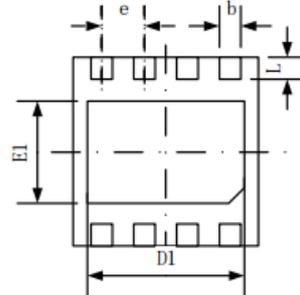

BOTTOM VIEW

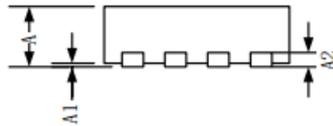

SIDE VIEW

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	0.700	0.800	0.028	0.031
A1	0.000	0.050	0.000	0.002
A2	0.203		0.008	
b	0.300	0.400	0.012	0.016
D	2.900	3.100	0.114	0.122
D1	2.510	2.610	0.099	0.103
E	2.900	3.100	0.114	0.122
E1	1.550	1.650	0.061	0.065
e	0.650 TYP		0.026 TYP	
L	0.350	0.450	0.014	0.018