



AOS
SEMICONDUCTOR

产品规格说明书

Product Data Sheet

AOS2G125xx

WEB | www.aossemi.cn 



电源管理IC



通信接口芯片




二三极管



LDO稳压器



逻辑器件



MOSFETs



运算放大器



显示驱动



MCU单片机



光电器件



AOS2G125 Dual Bus Buffer Gate With 3-State Outputs

DESCRIPTIONS

The dual buffer is designed for 1.65V to 5.5V V_{CC} operation. The AOS2G125 device is dual line drivers with 3-state outputs. The outputs are disabled when the output-enable ($\overline{OE}$) input is high.

This device is fully specified for partial-power-down applications using I_{off} . The I_{off} circuitry disables the outputs, preventing damaging current backflow through the device when it is powered down.

To ensure the high-impedance state during power up or power down, $\overline{OE}$ should be tied to V_{CC} through a pullup resistor, the minimum value of the resistor is determined by the current-sinking capability of the driver.

The AOS2G125 is available in Green MSOP-8 package. It operates over an ambient temperature range of -40°C to $+125^{\circ}\text{C}$.


FEATURES

- ★ Operating Voltage Range: 1.65V to 5.5V
- ★ Low Power Consumption: 1 μA (Max)
- ★ Operating Temperature Range: -40°C to $+125^{\circ}\text{C}$
- ★ Inputs Accept Voltage to 5.5V
- ★ $\pm 24\text{mA}$ Output Drive $V_{CC}=3.0\text{V}$
- ★ PACKAGE: MSOP-8

APPLICATIONS

- ★ AV Receiver
- ★ Cable Modem Termination Systems
- ★ Digital Picture Frame (DPF)
- ★ High-Speed Data Acquisition and Generation
- ★ Motor Controls: High-Voltage
- ★ Personal Navigation Device (GPS)
- ★ Portable Media Player
- ★ Video Communication Systems

Simplified Schematic

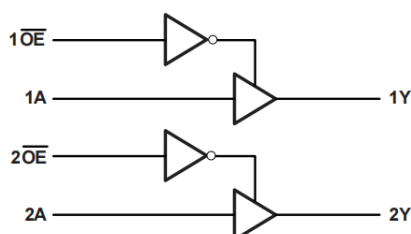Device Information⁽¹⁾

PART NUMBER	PACKAGE	BODY SIZE (NOM)
AOS2G125	MSOP-8	3.00mm × 3.00mm

(1) For all available packages, see the orderable addendum at the end of the data sheet.

FUNCTION TABLE

INPUTS		OUTPUT
$\overline{OE}$	B	Y
L	H	H
L	L	L
H	X	Z

H=HIGH Logic Level

L=LOW Logic Level

X=Don't Care

Z=High-impedance OFF-state




PACKAGE/ORDERING INFORMATION

PRODUCT	ORDERING NUMBER	TEMPERATURE RANGE	PACKAGE LEAD	PACKAGE MARKING ⁽¹⁾	PACKAGE OPTION
AOS2G125	AOS2G125XM	-40℃~+125℃	MSOP-8	AOS2G125	Tape and Reel,4000

NOTE:

- (1) This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the right-hand navigation.
- (2) There may be additional marking, which relates to the lot trace code information (data code and vendor code), the logo or the environmental category on the device.

PIN CONFIGURATIONS

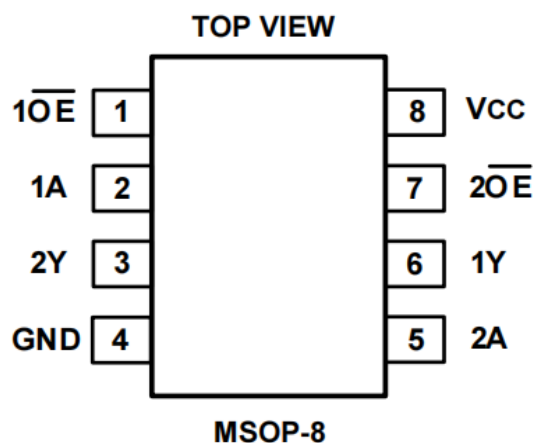

PIN DESCRIPTION

PIN	NAME	I/O TYPE	FUNCTION
MSOP-8			
1	1 $\overline{OE}$	I	Output Enable for buffer 1
2	1A	I	Input of buffer 1
3	2Y	O	Output of buffer 2
4	GND	-	Ground
5	2A	I	Input of buffer 2
6	1Y	O	Output of buffer 1
7	2 $\overline{OE}$	I	Output Enable for buffer 2
8	V _{CC}	-	Power Pin

(1) I=input, O=output.



Specifications

Absolute Maximum Ratings⁽¹⁾

Over operating free-air temperature range (unless otherwise noted) ⁽¹⁾⁽²⁾

			MIN	MAX	UNIT
V _{CC}	Supply voltage range		-0.5	6.5	V
V _I	Input voltage range ⁽²⁾		-0.5	6.5	
V _O	Voltage range applied to any output in the high-impedance or power-off state ⁽²⁾		-0.5	6.5	
V _O	Voltage range applied to any output in the high or low state ⁽²⁾⁽³⁾		-0.5	V _{CC} ± 0.5	
I _{IK}	Input clamp current	V _I < 0		-50	mA
I _{OK}	Output clamp current	V _O < 0		-50	
I _O	Continuous output current			± 50	
	Continuous current through V _{CC} or GND			± 100	
T _J	Junction temperature		-65	150	°C
T _{stg}	Storage temperature		-65	150	

- (1) Stresses beyond those listed under *Absolute Maximum Ratings* may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under *Recommended Operating Conditions* is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
- (2) The input and output negative-voltage ratings may be exceeded if the input and output current ratings are observed.
- (3) The value of V_{CC} is provided in the *Recommended Operating Conditions table*.
- (4) The maximum power dissipation is a function of T_{J(MAX)}, R_{θJA}, and T_A. The maximum allowable power dissipation at any ambient temperature is P_D = (T_{J(MAX)} - T_A) / R_{θJA}. All numbers apply for packages soldered directly onto a PCB.



ESD Ratings

The following ESD information is provided for handling of ESD-sensitive devices in an ESD protected area only.

			VALUE	UNIT
$V_{(ESD)}$	Electrostatic discharge	Human-Body Model (HBM)	± 8000	V
		Human-body model (HBM), per ANSI/ESDA/JEDEC JS-001 ⁽¹⁾	± 500	

Thermal Information:

THERMAL METRIC ⁽¹⁾		AOS2G125	UNIT
		8PINS	
		MSOP-8	
$R_{\theta JA}$	Junction-to-ambient thermal resistance	165	°C /W
$R_{\theta JC(top)}$	Junction-to-case(top) thermal resistance	53	
$R_{\theta JB}$	Junction-to-board thermal resistance	87	
ψ_{JT}	Junction-to-top characterization parameter	4.9	
ψ_{JB}	Junction-to-board characterization parameter	85	
$R_{\theta JC(bot)}$	Junction-to-case(bottom) thermal resistance	N/A	

(1) Thermal resistance varies with operating conditions.

**ELECTRICAL CHARACTERISTICS**

over recommended operating free-air temperature range(TYP values are at $T_A=+25^{\circ}\text{C}$, unless otherwise noted.) ⁽¹⁾

Recommended Operating Conditions

PARAMETER	SYMBOL	V_{CC}	MIN	MAX	UNIT
Supply voltage	V_{CC}	Operating	1.65	5.5	V
		Data retention only	1.5	5.5	
High-level input voltage	V_{IH}	$V_{CC}=1.65\text{V to }1.95\text{V}$	$0.65 \times V_{CC}$		
		$V_{CC}=2.3\text{V to }2.7\text{V}$	1.7		
		$V_{CC}=3\text{V to }3.6\text{V}$	2.2		
		$V_{CC}=4.5\text{V to }5.5\text{V}$	$0.7 \times V_{CC}$		
Low-level input voltage	V_{IL}	$V_{CC}=1.65\text{V to }1.95\text{V}$		$0.15 \times V_{CC}$	
		$V_{CC}=2.3\text{V to }2.7\text{V}$		0.3	
		$V_{CC}=3\text{V to }3.6\text{V}$		0.4	
		$V_{CC}=4.5\text{V to }5.5\text{V}$		$0.15 \times V_{CC}$	
Input voltage	V_I		0	5.5	
Output voltage	V_O		0	V_{CC}	
Input transition rise or fall	t_t, t_f	$V_{CC}=1.8\text{V} \pm 0.15\text{V}, 2.5\text{V} \pm 0.2\text{V}$		20	ns/V
		$V_{CC}=3.3\text{V} \pm 0.3\text{V}$		10	
		$V_{CC}=5\text{V} \pm 0.5\text{V}$		5	
Operating temperature	T_A		-40	+125	$^{\circ}\text{C}$



Electrical Characteristics

PARAMETER		CONDITIONS	V _{CC}	TEMP	MIN	TYP	MAX	UNIT
V _{OH}		I _{OH} = -100 μ A	1.65V to 5.5V	Full	V _{CC} -0.1			V
		I _{OH} = -4mA	1.65V		1.2			
		I _{OH} = -8mA	2.3V		1.9			
		I _{OH} = -16mA	3V		2.4			
		I _{OH} = -24mA			2.3			
		I _{OH} = -32mA	4.5V		3.8			
V _{OL}		I _{OH} =100 μ A	1.65V to 5.5V	Full			0.1	
		I _{OH} =4mA	1.65V				0.45	
		I _{OH} =8mA	2.3V				0.3	
		I _{OH} =16mA	3V				0.4	
		I _{OH} =24mA					0.55	
		I _{OH} =32mA	4.5V				0.55	
I _I	A or $\overline{OE}$ inputs	V _I =5.5V or GND	0V to 5.5V	+25°C		± 0.1	± 1	μ A
				Full			± 5	
I _{off}		V _I or V _O =5.5V	0	+25°C		± 0.1	± 1	
				Full			± 10	
I _{oz}		V _O =0V to 5.5V	3.6V	Full			10	
I _{CC}		V _I =5.5V or GND, I _O =0	1.65V to 5.5V	+25°C		0.1	1	
				Full			10	
Δ I _{CC}		One input at V _{CC} -0.6V, Other inputs at V _{CC} or GND	3V to 5.5V	Full			500	

**Switching Characteristics, $C_L=15\text{pF}$**

over recommended operating free-air temperature range (-40°C to 125°C , unless otherwise noted.) ⁽¹⁾

PARAMETER	FROM (INPUT)	TO (OUTPUT)	$V_{CC}=1.8\text{V} \pm 0.15\text{V}$	$V_{CC}=2.5\text{V} \pm 0.2\text{V}$	$V_{CC}=3.3\text{V} \pm 0.3\text{V}$	$V_{CC}=5\text{V} \pm 0.5\text{V}$	UNIT
			TYP	TYP	TYP	TYP	
t_{pd}	A	Y	6.1	3.7	3.9	2.1	ns

Switching Characteristics, $C_L=30\text{pF}$ or 50pF

over recommended operating free-air temperature range (-40°C to 125°C , unless otherwise noted.)

PARAMETER	FROM (INPUT)	TO (OUTPUT)	$V_{CC}=1.8\text{V} \pm 0.15\text{V}$	$V_{CC}=2.5\text{V} \pm 0.2\text{V}$	$V_{CC}=3.3\text{V} \pm 0.3\text{V}$	$V_{CC}=5\text{V} \pm 0.5\text{V}$	UNIT
			TYP	TYP	TYP	TYP	
t_{pd}	A	Y	8.6	5.3	4.0	2.9	ns
t_{en}	$\overline{OE}$	Y	9.5	5.8	5.0	3.3	
t_{dis}	$\overline{OE}$	Y	7.4	4.3	4.4	3.0	

Operating Characteristics


$T_A=25^{\circ}\text{C}$

PARAMETER SYMBOL			TEST CONDITIONS	$V_{CC}=1.8\text{V}$	$V_{CC}=2.5\text{V}$	$V_{CC}=3.3\text{V}$	$V_{CC}=5\text{V}$	UNIT
				TYP	TYP	TYP	TYP	
C_{pd}	Power dissipation capacitance	Output enabled	$f=10\text{MHz}$	18	18	19	21	pF
		Output disabled		2	2	2	4	

- (1) All unused inputs of the device must be held at VCC or GND to ensure proper device operation.
- (2) Limits are 100% production tested at 25°C . Limits over the operating temperature range are ensured through correlations using statistical quality control (SQC) method.
- (3) Typical values represent the most likely parametric norm as determined at the time of characterization. Actual typical values may vary over time and will also depend on the application and configuration.







Parameter Measurement Information

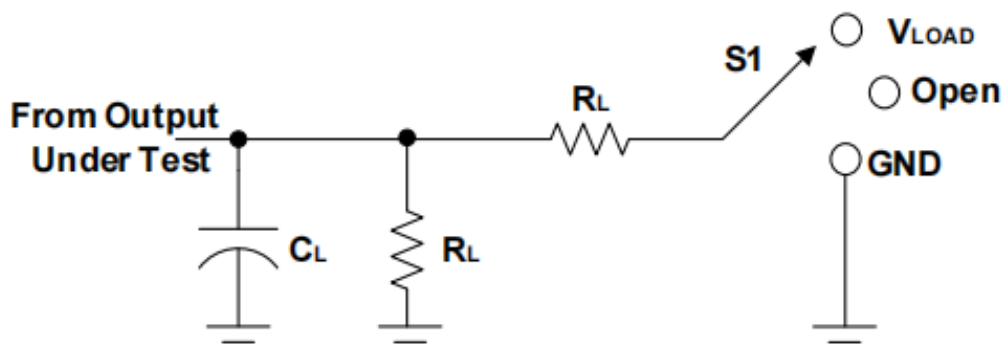

TEST	S1
t_{PLH}/t_{PHL}	Open
t_{PLZ}/t_{PZL}	V_{LOAD}
t_{PHZ}/t_{PZH}	GND

V_{CC}	INPUTS		V_M	V_{LOAD}	C_L	R_L	V_{Δ}
	V_I	t_r/t_f					
$1.8V \pm 0.15V$	V_{CC}	$\leq 2ns$	$V_{CC}/2$	$2 \times V_{CC}$	15pF	1M Ω	0.15V
$2.5V \pm 0.2V$	V_{CC}	$\leq 2ns$	$V_{CC}/2$	$2 \times V_{CC}$	15pF	1M Ω	0.15V
$3.3V \pm 0.3V$	3V	$\leq 2.5ns$	1.5V	6V	15pF	1M Ω	0.3V
$5V \pm 0.5V$	V_{CC}	$\leq 2.5ns$	$V_{CC}/2$	$2 \times V_{CC}$	15pF	1M Ω	0.3V

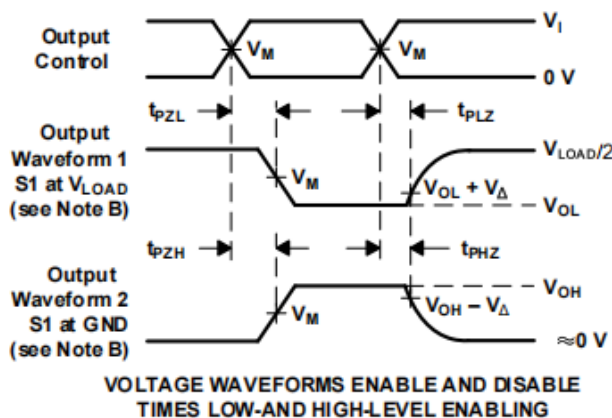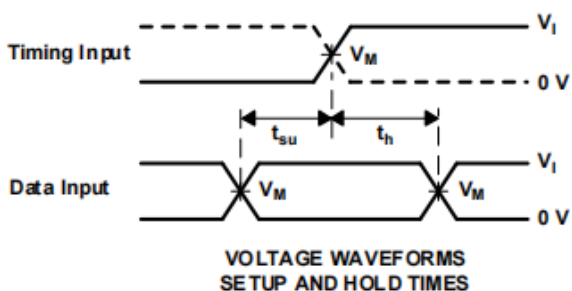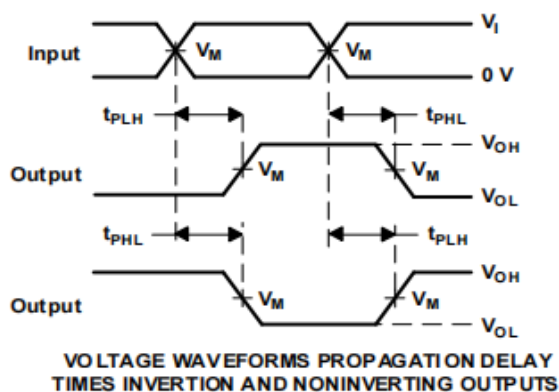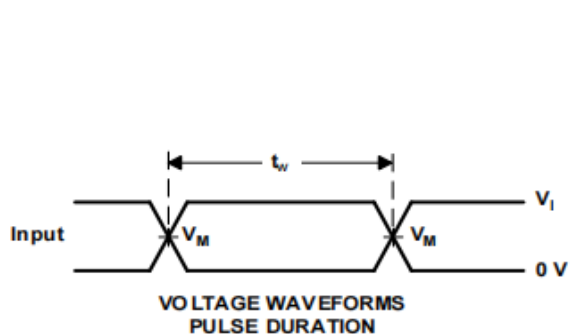




- NOTES:
- A. CL includes probe and jig capacitance.
 - B. Waveform 1 is for an output with internal conditions such that the output is low, except when disabled by the output control.
Waveform 2 is for an output with internal conditions such that the output is high, except when disabled by the output control.
 - C. All input pulses are supplied by generators having the following characteristics: $PRR \leq 10\text{MHz}$, $Z_0 = 50\Omega$.
 - D. The outputs are measured one at a time, with one transition per measurement.
 - E. t_{PLZ} and t_{PHZ} are the same as t_{dis} .
 - F. t_{PZL} and t_{PZH} are the same as t_{en} .
 - G. t_{PLH} and t_{PHL} are the same as t_{pd} .
 - H. All parameters and waveforms are not applicable to all devices.

Figure 1. Load Circuit and Voltage Waveforms



PACKAGE OUTLINE DIMENSIONS
MSOP-8

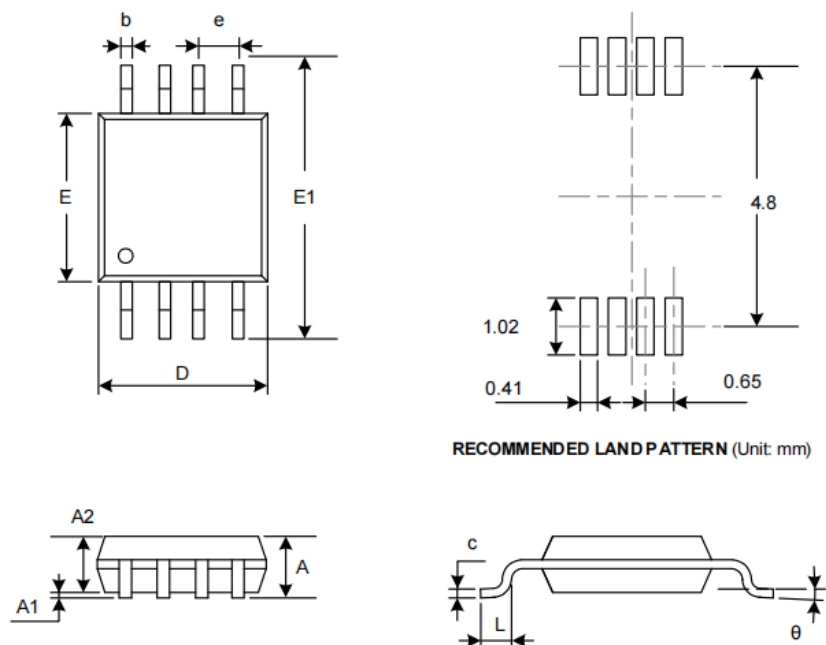


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	0.820	1.100	0.032	0.043
A1	0.020	0.150	0.001	0.006
A2	0.750	0.950	0.030	0.037
b	0.250	0.380	0.010	0.015
c	0.090	0.230	0.004	0.009
D	2.900	3.100	0.114	0.122
e	0.650(BSC)		0.026(BSC)	
E	2.900	3.100	0.114	0.122
E1	4.750	5.050	0.187	0.199
L	0.400	0.800	0.016	0.031
θ	0 °	6 °	0 °	6 °

NOTE:

- A. All linear dimension is in millimeters.
- B. This drawing is subject to change without notice.
- C. Body dimensions do not include mold flash or protrusion. Mold flash and protrusion shall not exceed 0.15 per side.
- D. BSC:Basic Dimension. Theoretically exact value shown without tolerances.



TAPE AND REEL INFORMATION

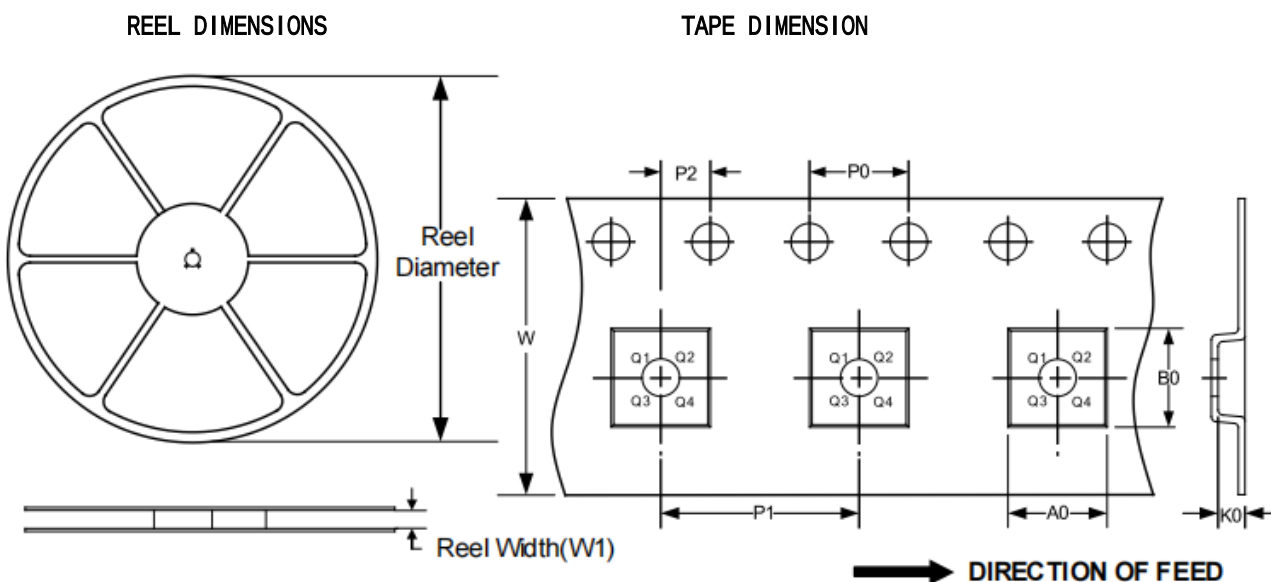

NOTE: The picture is only for reference. Please make the object as the standard.

KEY PARAMETER LIST OF TAPE AND REEL

Package Type	Reel Diameter	Reel Width(mm)	A0 (mm)	B0 (mm)	K0 (mm)	P0 (mm)	P1 (mm)	P2 (mm)	W (mm)	Pin1 Quadrant
MSOP-8	13''	12.4	5.20	3.30	1.50	4.0	8.0	2.0	12.0	Q1

NOTE:

1. All dimensions are nominal.
2. Plastic or metal protrusions of 0.15mm maximum per side are not included.