



AOS
SEMICONDUCTOR

产品规格说明书

Product Data Sheet

AOS244Yxx

WEB | www.aossemi.cn 



电源管理IC



通信接口芯片




二三极管



LDO稳压器



逻辑器件



MOSFETs



运算放大器



显示驱动



MCU单片机



光电器件



Octal Buffer/Driver With 3-State Outputs

DESCRIPTIONS

This AOS244 is an octal non-inverting buffer/driver with 3-state outputs. The 3-state outputs are controlled by the output enable inputs $1\overline{OE}$ and $2\overline{OE}$. A HIGH on $\overline{OE}$ causes the outputs to assume a high impedance OFF-state. V_{CC} supporting operating voltage from 1.65V to 5.5V.

To ensure the high-impedance state during power up or power down, $\overline{OE}$ should be tied to V_{CC} through a pullup resistor, the minimum value of the resistor is determined by the current -sinking capability of the driver.

FEATURES

- ★ Power-Supply Range: 1.65V to 5.5V
- ★ V_{CC} Isolation: If V_{CC} is at GND, Both Ports are in the High-Impedance State
- ★ I_{OFF} : Supports Partial-Power-Down Mode Operation
- ★ Extended Temperature: -40°C to $+125^{\circ}\text{C}$

APPLICATIONS

- ★ Handset
- ★ Smartphone
- ★ Tablet
- ★ Desktop PC


Device Information ⁽¹⁾

PARTNUMBER	PACKAGE	BODY SIZE (NOM)
AOS244	TSSOP20(20)	6.50mm × 4.40mm
	SOP20(20)	12.80mm × 7.50mm

(1) For all available packages, see the orderable addendum at the end of the data sheet.



Functional Block Diagram

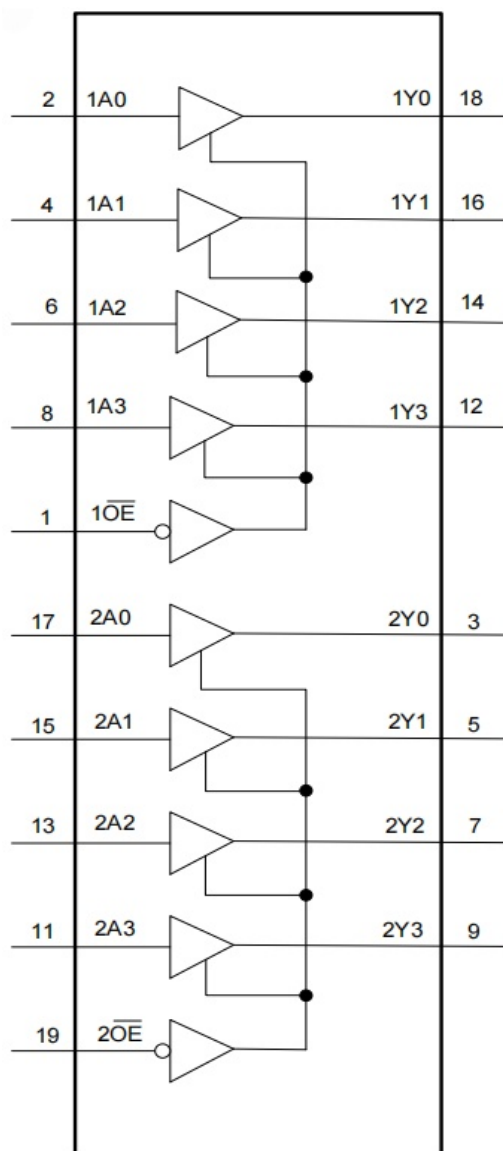

Function Table

INPUTS		OUTPUT
$\overline{OE}$	A PORT	Y PORT
L	H	H
L	L	L
H	X	Hi-Z

NOTE:

H=HIGH voltage level


L=LOW voltage level

X=Don't care

Z=High impedance OFF-state



PIN CONFIGURATIONS

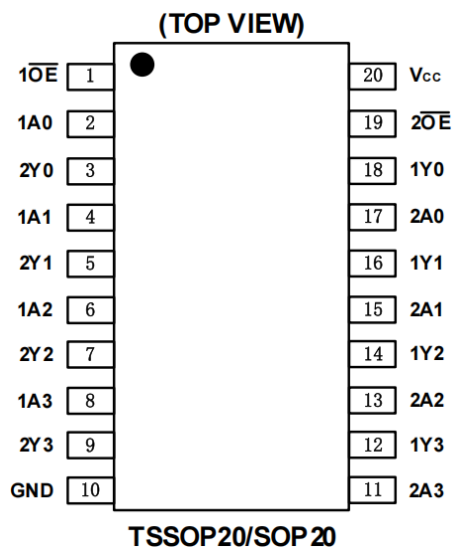

PIN DESCRIPTION

PIN	NAME	TYPE ⁽¹⁾	FUNCTION
TSSOP20/SOP20			
1	1OE	I	Output Enable (Active Low). Pull 1OE high to place all outputs in 3-state mode.
2	1A0	I	Input
3	2Y0	O	Output
4	1A1	I	Input
5	2Y1	O	Output
6	1A2	I	Input
7	2Y2	O	Output
8	1A3	I	Input
9	2Y3	O	Output
10	GND	G	Ground.
11	2A3	I	Input
12	1Y3	O	Output
13	2A2	I	Input
14	1Y2	O	Output
15	2A1	I	Input
16	1Y1	O	Output
17	2A0	I	Input
18	1Y0	O	Output
19	2OE	I	Output Enable (Active Low). Pull 2OE high to place all outputs in 3-state mode.
20	V _{CC}	P	Supply voltage. 1.65V ≤ V _{CC} ≤ 5.5V

(1) I=input, O=output, P=power, G=Ground.

**SPECIFICATIONS****Absolute Maximum Ratings**Over operating free-air temperature range (unless otherwise noted)⁽¹⁾

SYMBOL	PARAMETER		MIN	MAX	UNIT
V_{CC}	Supply Voltage Range		-0.5	6.5	V
$V_I^{(2)}$	Input Voltage Range	A port	-0.5	6.5	
		Control inputs	-0.5	6.5	
$V_O^{(2)}$	Voltage range applied to any output in the high-impedance or power-off state	Y port	-0.5	6.5	
$V_O^{(2)(3)}$	Voltage range applied to any output in the high or low state	Y port	-0.5	$V_{CC}+0.5$	mA
I_{IK}	Input Clamp Current	$V_I < 0$		-50	
I_{OK}	Output Clamp Current	$V_O < 0$		-50	
I_O	Continuous output current			± 50	
	Continuous current through V_{CC} or GND			± 100	
T_J	Junction Temperature			150	$^{\circ}\text{C}$
T_{stg}	Storage Temperature		-65	150	

- (1) Stresses beyond those listed under Absolute Maximum Ratings may cause permanent damage to the device. These are stress ratings only, which do not imply functional operation of the device at these or any other conditions beyond those indicated under Recommended Operating Conditions. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
- (2) The input and output negative-voltage ratings may be exceeded if the input and output current ratings are observed.
- (3) The value of V_{CC} are provided in the recommended operating conditions table.

ESD Ratings

			VALUE	UNIT
$V_{(ESD)}$	Electrostatic discharge	Human-Body Model (HBM)	± 2000	V
		Machine Model (MM)	± 200	

**Recommended Operating Conditions**

V_{CC} is the supply voltage associated with the input port and output port. ⁽¹⁾⁽²⁾

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
Supply Voltage	V _{CC}		1.65		5.5	V
High-Level Input Voltage (V _{IH})	Inputs	1.65V to 1.95V	V _{CC} x0.65			
		2.3V to 2.7V	1.7			
		3V to 3.6V	2			
		4.5V to 5.5V	V _{CC} x0.7			
Low-Level Input Voltage (V _{IL})	Inputs	1.65V to 1.95V			V _{CC} x0.35	
		2.3V to 2.7V			0.7	
		3V to 3.6V			0.8	
		4.5V to 5.5V			V _{CC} x0.3	
Input Voltage(V _I)	Input voltage		0		5.5	mA
Output Voltage(V _O)	Output voltage		0		V _{CC}	
High-Level Output Current(I _{OH})		1.65V to 1.95V			-4	
		2.3V to 2.7V			-8	
		3V to 3.6V			-24	
		4.5V to 5.5V			-32	
Low-Level Output Current(I _{OL})		1.65V to 1.95V			4	
		2.3V to 2.7V			8	
		3V to 3.6V			24	
		4.5V to 5.5V			32	
Input transition rise or fall rate(Δ t/ Δ v)	Data inputs	1.65V to 1.95V			20	ns/V
		2.3V to 2.7V			20	
		3V to 3.6V			10	
		4.5V to 5.5V			5	
T _A Operating free-air Temperature			-40		125	°C

(1) All unused or driven (floating) data inputs (I/Os) of the device must be held at logic HIGH or LOW (preferably V_{CC} or GND) to ensure proper device operation and minimize power.

(2) All unused control inputs must be held at V_{CC} or GND to ensure proper device operation and minimize power consumption.

(3) For V_{CC} values not specified in the data sheet, $V_{IHmin} = V_{CC} \times 0.7V$, $V_{ILmax} = V_{CC} \times 0.3V$.

**PACKAGE/ORDERING INFORMATION⁽¹⁾**

PRODUCT	ORDERING NUMBER	TEMPERATURE RANGE	PACKAGE LEAD	PACKAGE MARKING ⁽²⁾	MSL ⁽³⁾	PACKAGE OPTION
AOS244	AOS244XTSS20	-40°C~+125°C	TSSOP20	AOS244	MSL3	Tape and Reel,4000
	AOS244XS20	-40°C~+125°C	SOP20	AOS244	MSL3	Tape and Reel,1500

NOTE:

- (1) There may be additional marking, which relates to the lot trace code information (datacode and vendor code), the logo or the environmental category on the device.
- (3) MSL, The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications.



ELECTERICAL CHARACTERISTICS

over recommended operating free-air temperature range (unless otherwise noted)

PARAMETER		TEST CONDITIONS		V _{CC}	TEMP	MIN ⁽³⁾	TYP ⁽⁴⁾	MAX ⁽³⁾	UNIT
V _{OH}		I _{OH} = -100 μ A	V _I =V _{IH}	1.65V to 4.5V	Full	V _{CC} -0.1			V
		I _{OH} = -4mA	V _I =V _{IH}	1.65V		1.2			
		I _{OH} = -8mA	V _I =V _{IH}	2.3V		1.9			
		I _{OH} = -24mA	V _I =V _{IH}	3V		2.4			
		I _{OH} = -32mA	V _I =V _{IH}	4.5V		3.8			
V _{OL}		I _{OL} =100 μ A	V _I =V _{IL}	1.65V to 4.5V				0.1	
		I _{OL} =4mA	V _I =V _{IL}	1.65V				0.45	
		I _{OL} =8mA	V _I =V _{IL}	2.3V				0.4	
		I _{OL} =24mA	V _I =V _{IL}	3V				0.55	
		I _{OL} =32mA	V _I =V _{IL}	4.5V				0.55	
I _I		V _I =5.5V or GND		5.5V	+25°C			± 1	μ A
I _{off}		V _I or V _O =0 to 5.5V		0V	+25°C			± 1	
					Full			± 2	
I _{OZ}		V _O =V _{CC} or GND, OE=V _{IH}		1.65V to 5.5V	+25°C			± 1	
					Full			± 2	
I _{CC}	V _{CC} supply current	V _I =V _{CC} or GND, I _O =0		1.65V to 5.5V	+25°C			1	
					Full			5	
				0V	Full			-2	
Δ I _{CC}		One A port at V _{CCA} – 0.6V, Y port=open		3V to 5.5V	Full			50	pF
C _I		V _I =V _{CC} or GND		3.3V	+25°C		8.5		
C _O		V _O =V _{CC} or GND		3.3V			8.5		



Switching Characteristics

over recommended operating free-air temperature range(unless otherwise noted).

PARAMETER	FROM(INPUT)	TO(OUTPUT)	V _{CC} =1.8V ± 0.15V		V _{CC} =2.5V ± 0.2V		V _{CC} =3.3V ± 0.3V		V _{CC} =5V ± 0.5V		UNIT
			MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	
t _{PLH}	An	Yn	1.7	21.6	1.3	9.1	1.0	7.4	0.8	7.1	ns
t _{PHL}											
t _{PHZ}	$\overline{OE}$	Yn	2.4	32.2	1.9	12.9	1.7	12.0	1.3	10.2	
t _{PLZ}											
t _{PZH}	$\overline{OE}$	Yn	1.8	31.9	1.5	16	1.2	12.6	0.9	10.8	
t _{PZL}											

Operating Characteristics

$T_A=25^{\circ}C$



PARAMETER TEST CONDITIONS			$V_{CC}=1.8V$	$V_{CC}=2.5V$	$V_{CC}=3.3V$	$V_{CC}=5V$	UNIT
			TYP	TYP	TYP	TYP	
$C_{pd}^{(1)}$	Outputs enabled	$C_L=0, f=10MHz, t_r=t_f=1ns$	42	42	43	44	pF
	Outputs disabled		2	2	2	3	

(1)Power dissipation capacitance per transceiver.




Typical Characteristics

At $T_A = +25^\circ\text{C}$, $V_{CC} = 5.5\text{V}$, unless otherwise noted.

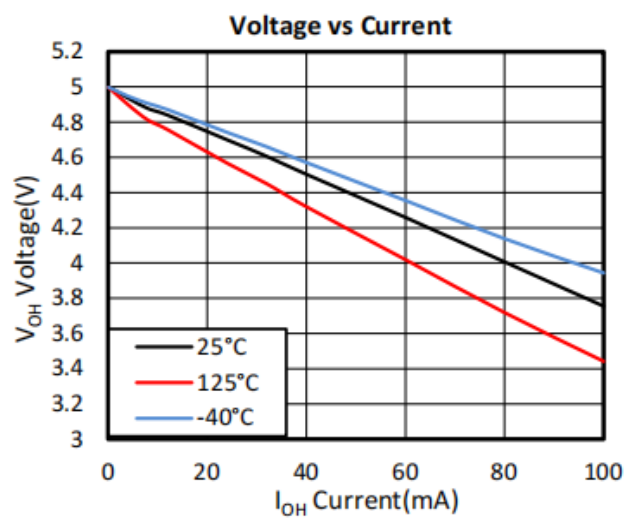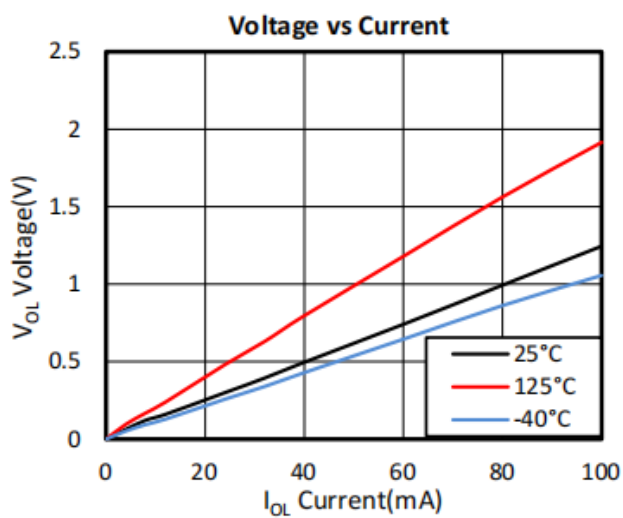






Parameter Measurement Information

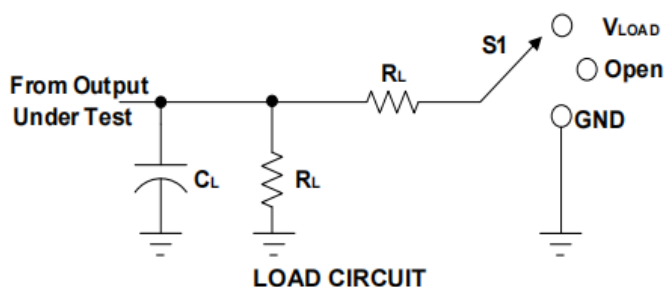

TEST	S1
t_{pd}	Open
t_{PLZ}/t_{PZL}	V_{LOAD}
t_{PHZ}/t_{PZH}	GND

V_{CC}	V_I	V_M	C_L	R_L	V_{TP}
$1.8V \pm 0.15V$	V_{CC}	$V_{CC}/2$	15pF	2k Ω	0.15V
$2.5V \pm 0.2V$	V_{CC}	$V_{CC}/2$	15pF	2k Ω	0.15V
$3.3V \pm 0.3V$	2.7V	1.5V	15pF	2k Ω	0.3V
$5V \pm 0.5V$	2.7V	1.5V	15pF	2k Ω	0.3V

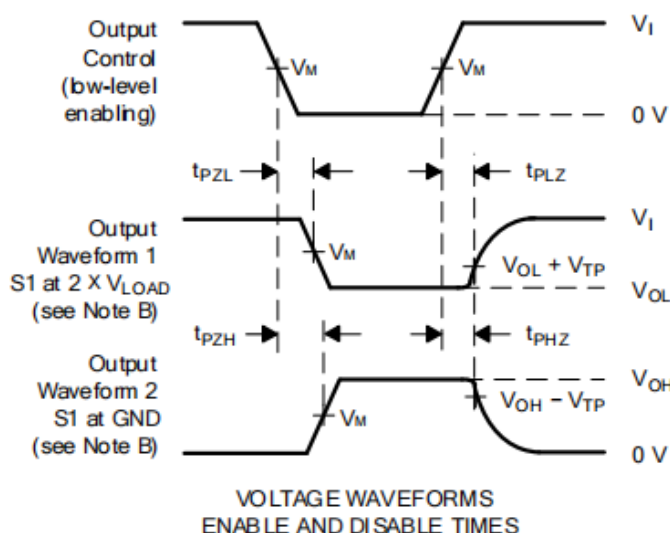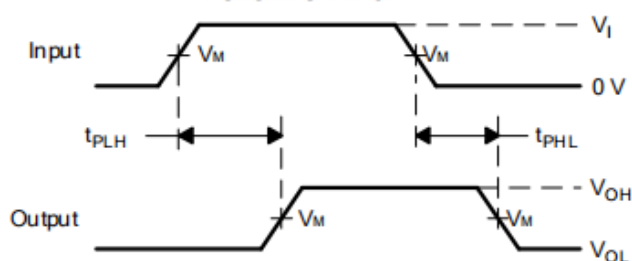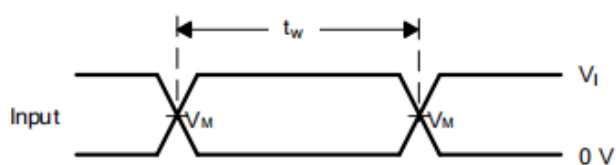


- NOTES: A. C_L includes probe and jig capacitance.
- B. Waveform 1 is for an output with internal conditions such that the output is low, except when disabled by the output control.
Waveform 2 is for an output with internal conditions such that the output is high, except when disabled by the output control.
- C. All input pulses are supplied by generators having the following characteristics: $PRR \leq 10$ MHz, $Z_0 = 50 \Omega$, $dv/dt \geq 1V/ns$.
- D. The outputs are measured one at a time, with one transition per measurement.
- E. t_{PLZ} and t_{PHZ} are the same as t_{dis} .
- F. t_{PZL} and t_{PZH} are the same as t_{en} .
- G. t_{PLH} and t_{PHL} are the same as t_{pd} .
- H. All parameters and waveforms are not applicable to all devices.

Figure 1. Load Circuit and Voltage Waveforms




PACKAGE OUTLINE DIMENSIONS TSSOP20

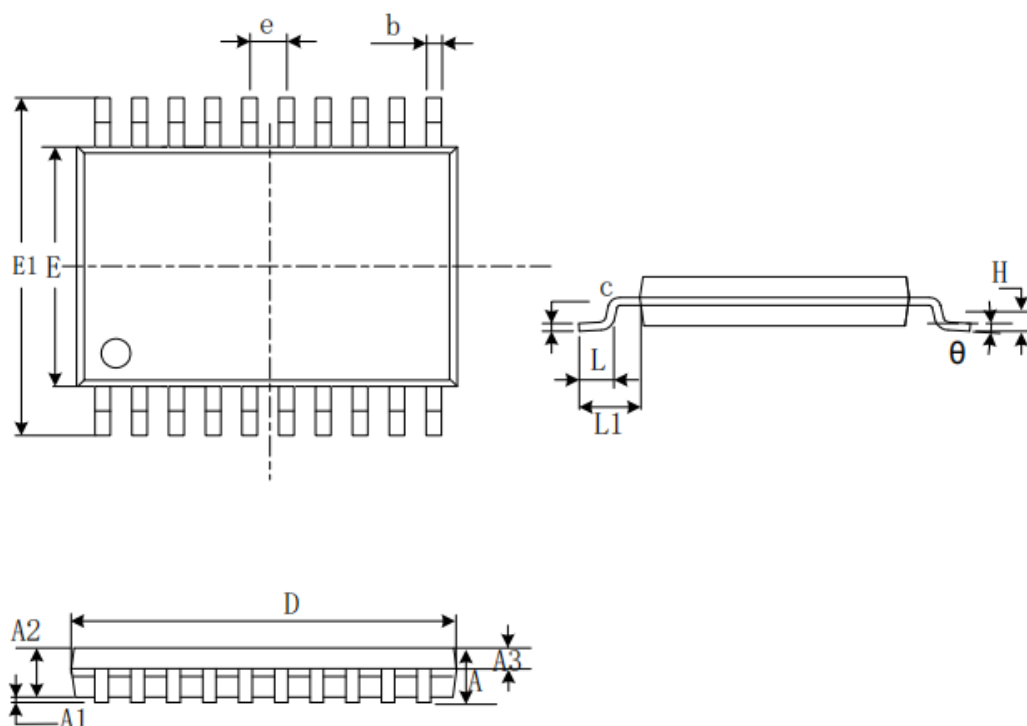

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A		1.200		0.047
A1	0.050	0.150	0.002	0.006
A2	0.800	1.050	0.031	0.041
A3	0.390	0.490	0.015	0.020
b	0.200	0.290	0.008	0.011
c	0.130	0.170	0.005	0.007
D	6.400	6.600	0.252	0.260
E	4.300	4.500	0.169	0.177
E1	6.200	6.600	0.244	0.260
e	0.650(BSC)		0.026(BSC)	
L	0.450	0.750	0.018	0.030
H	0.250(TYP)		0.010(TYP)	
θ	0 °	8 °	0 °	8 °
L1	1.00(REF)		0.039(REF)	



SOP20

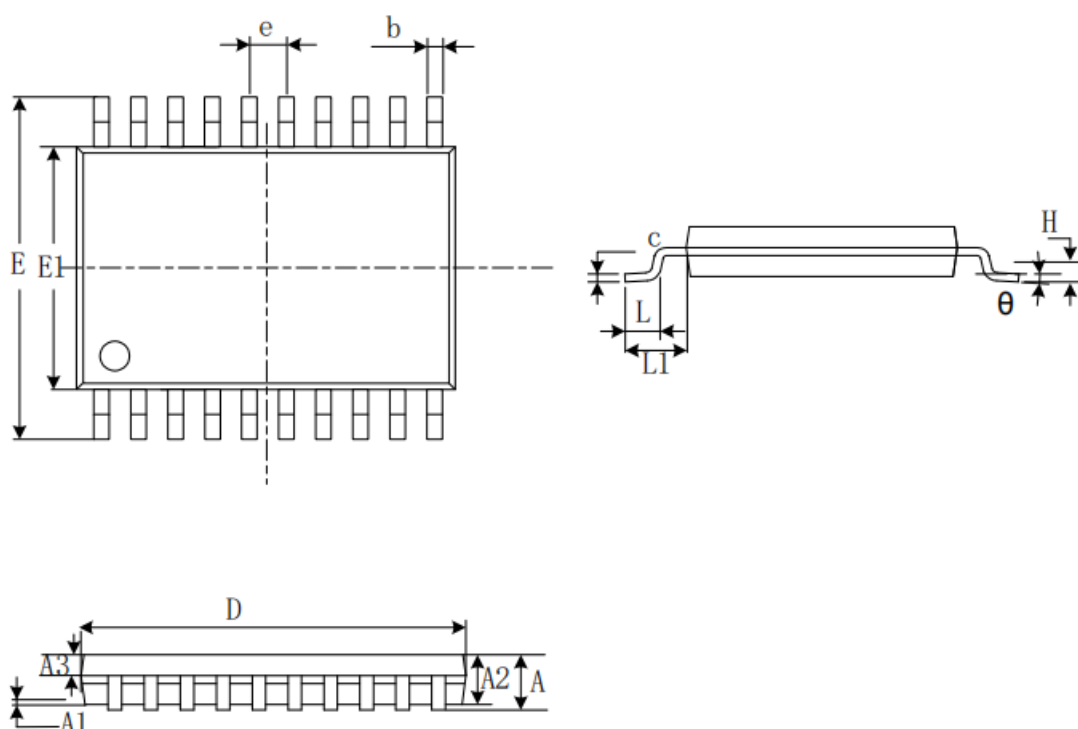


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A		2.650		0.104
A1	0.100	0.300	0.004	0.012
A2	2.250	2.350	0.089	0.093
A3	0.970	1.070	0.038	0.042
b	0.390	0.470	0.015	0.019
c	0.250	0.290	0.010	0.011
D	12.700	12.900	0.500	0.508
E	10.100	10.500	0.398	0.413
E1	7.400	7.600	0.291	0.299
e	1.270(BSC)		0.050(BSC)	
L	0.700	1.000	0.028	0.039
H	0.250(TYP)		0.010(TYP)	
θ	0 °	8 °	0 °	8 °
L1	1.400(REF)		0.055(REF)	




TAPE AND REEL INFORMATION

REEL DIMENSIONS

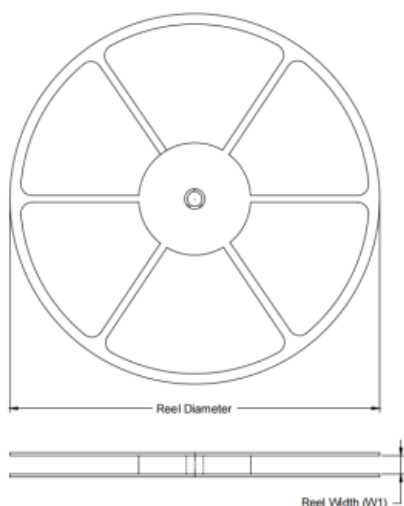

TAPE DIMENSION

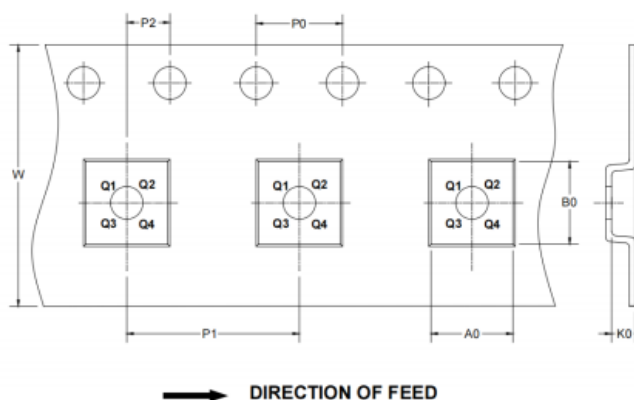

NOTE: The picture is only for reference. Please make the object as the standard.

KEY PARAMETER LIST OF TAPE AND REEL

Package Type	Reel Diameter	Reel Width(mm)	A0 (mm)	B0 (mm)	K0 (mm)	P0 (mm)	P1 (mm)	P2 (mm)	W (mm)	Pin1 Quadrant
TSSOP20	13''	12.4	6.75	6.95	1.20	4.0	8.0	2.0	12.0	Q1
SOP20	13''	24.4	10.75	13.55	2.65	4.0	12.0	2.0	24.0	Q1